



An intelligence equipment for panel installation




Specifications (Standard - Model X)

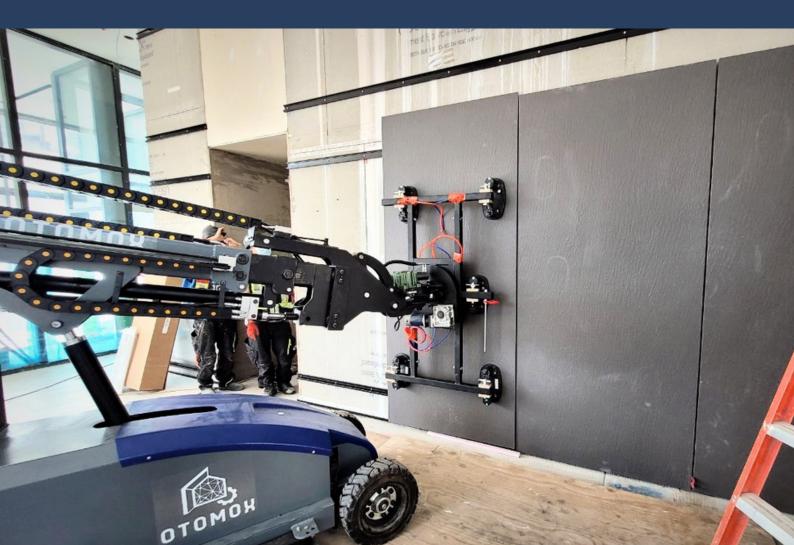



*Specification for Standard model



Standard Features

- 1. Capacity:700kg(retract)/230kg(extend)
- 2. Height: 5M
- 3. Hydraulic Power:24V/2KW/12L
- 4. Control:CP2207A-5102
- 5. Drive Wheel:DC24/1200W
- 6. Battery:2*12V/120Ah
- 7. Charger:24V/15A
- 8. Unload Gradeability:10%
- 9. 360° Auto Rotation
- 10. Left/right 90° Auto Tilting

Operating Elements

- 1. Control handle
- 2. Forward/backward switch
- 3. Emergency reverse switch
- 4. Horn
- 5. Battery meter
- 6. Key switch
- 7. Lift/Lower bar
- 8. Mast forward/backward bar
- 9. Emergency stop






Despite handling glazing, our robots have been designed to comply with all different kind of material (including but not limited to: Porcelain Panel/ HPL Panel / Format Tile/ Fiber Cement/ Metal Panel/ Wood Panel/ ACM Panel). Plus, the customized height and load capacity will certainly ease your specified requirements at your own job site in a stronger and faster way.

Specification for order


Model	А	В	с	D	E	X (Standard)
Load Capacity (Arm retract)	350 kg	400 kg	600 kg	200 kg	800 kg	700 kg
Load Capacity (Extend)	175 kg	200 kg	300 kg	200 kg	400 kg	230 kg
Lifting Height	3.5m	3.5m	3.65m	5m	5m	5m
QTY of Caps	4	6	6	6	8	6
Cap diameter	Ø300mm					
Maintenance-free Battery	2X12V/100Ah	2X12V/100Ah	2X12V/120Ah	2X12V/120Ah	2X12V/120Ah	2X12V/120Ah
Battery charger	Smart charger					
Drive motor	24V/ (600W)	24V/ (600W)	24V/ (900W)	24V/ (1200W)	24V/ (1200W)	24V/ (1200W)
Lifting Motor	24V/2000W/ 5L			24V/2000W/ 12L		
Front Wheel	Ø310X100mm		Ø375X110mm		Ø400X150mm	
Driving wheel	Ø250X80mm		Ø310X100mm		Ø300X125mm	
N.W./G.W.	780/820kg	800/850kg	1200/1250kg	1200/1250kg	1600/1700kg	1000/1080kg
Logo/ Colour	Customized (Logo printing charges extra cost)					

Apart from the above, want to customize your own model? Get the contact details on the last page!


Dimensions (Standard - Model X)

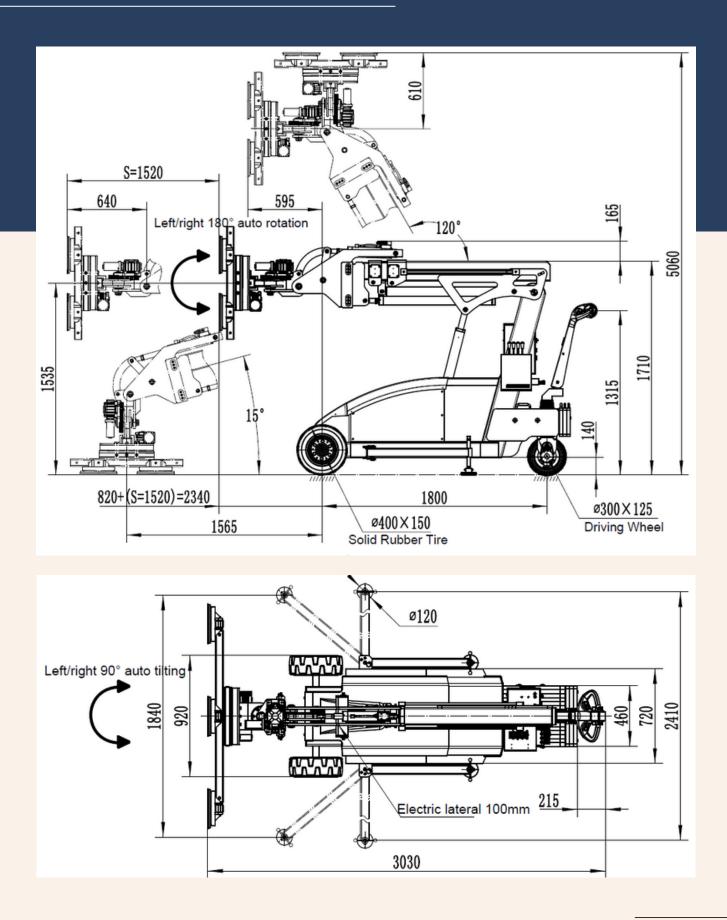

Dimensions Model A , B

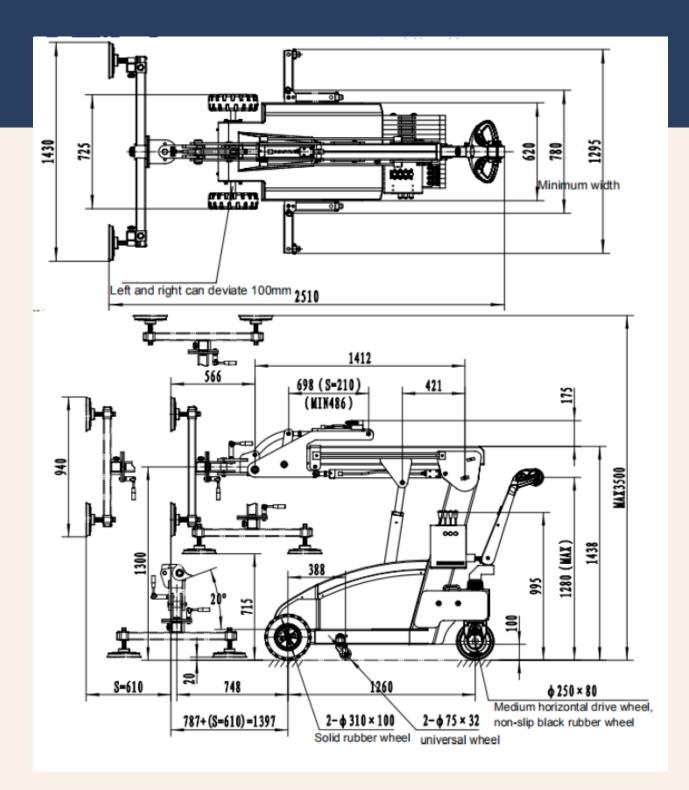


Dimensions Model C

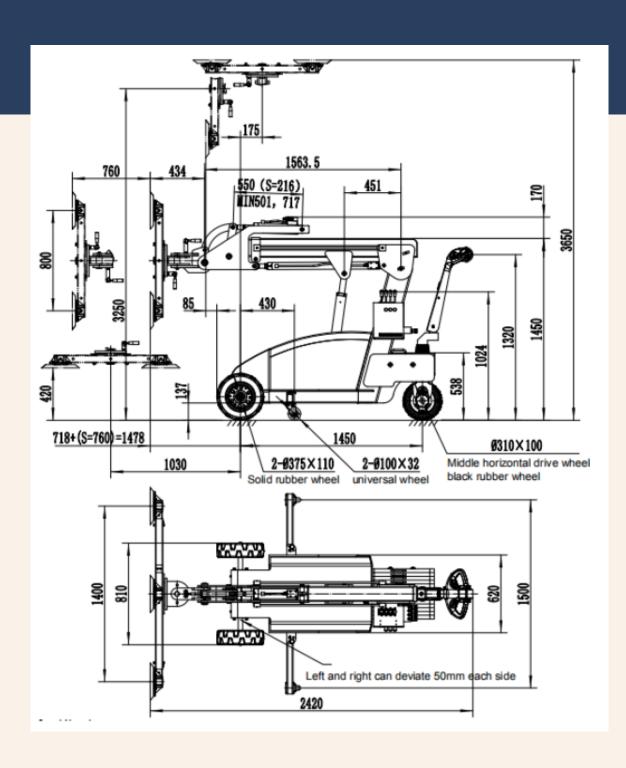

Dimensions


Model D

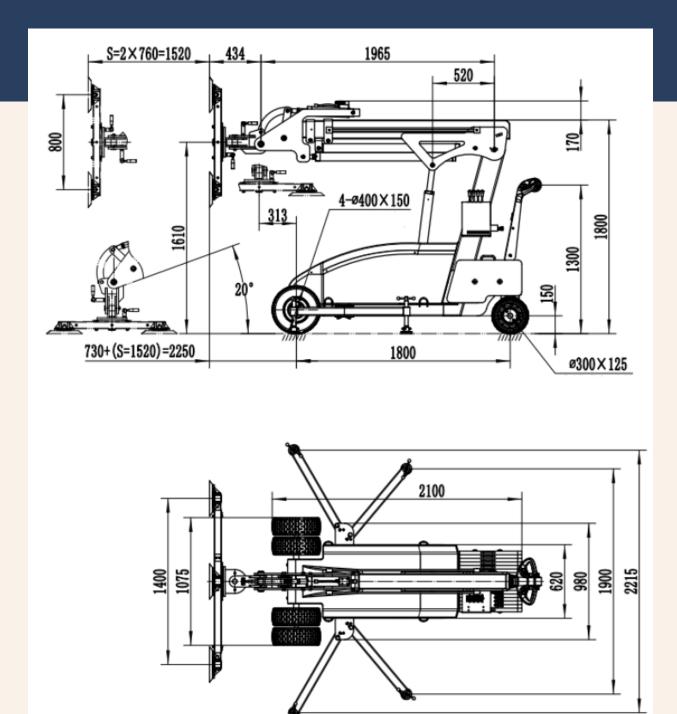

7

Dimensions

Model E

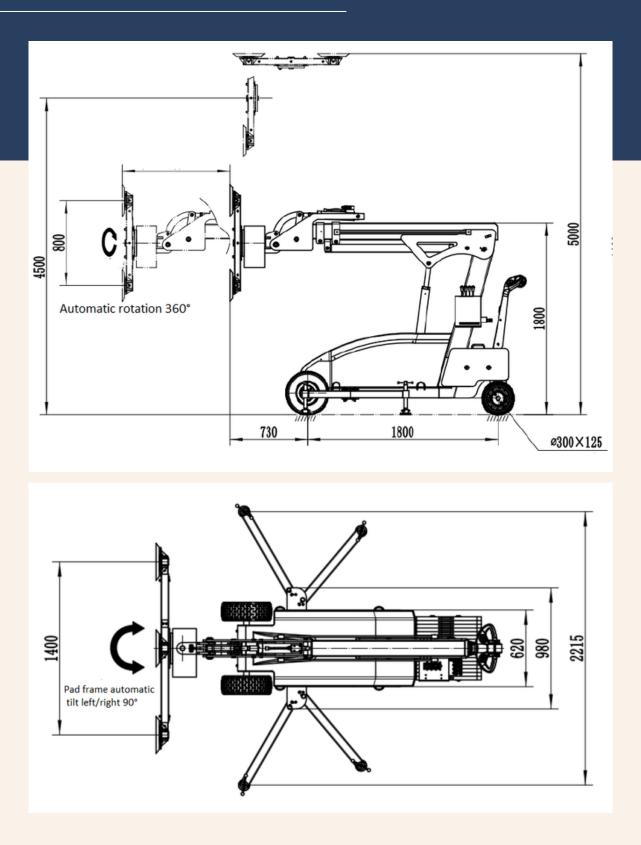

Highlights



180° rotation overhead installation



Detachable vacuum cup



Simple wireless remote control



Mobility in both indoor & outdoor



Safety Precaution: sudden fall & emergency decline needed









Any customized colour & logo



Contact Us



200-5050 Kingsway, Burnaby, BC, Canada V5H 4H2 604.783.2806 / 604.282.8899

